

NON-REBATED ADJUSTABLE DOOR FRAMES

NON-REBATED

CONSTRUCTION

Adjustable non-rebated door frame is made of a high-quality wood-based MDF board. On its visual side it is entirely coated with a decorative wood-imitation DRE-Cell veneer, 3D veneer, CPL laminate, or painted**. Its construction allows to be used with door leaf with the thickness of 40 mm and its design allows to be used on walls with span 75-320. In white mat, black mat, white UV varnish, white pine, sand oak, polish oak 3D white varnish, black varnish, decors from LUX and WOOD collections, there is possibility to choose connection of main beams at 90 degree.

**NOTE: To ensure the highest quality of painted and lacquered door frames, before varnishing or painting process they are coated with special material which constitutes solid base.

APPLICATION


Adjustable non-rebated door frame can be used with all DRE non-rebated collections of the door leaf.

SET CONTAINS


Main beam (one horizontal and two vertical elements) with wide angular architrave (80 mm) with small rounding angles of the cross-section profile (R2), door seal, a set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes.



ORB connection at 45




ORB connection at 90

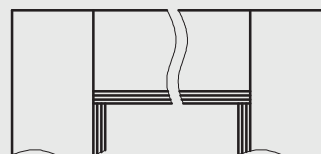


** connection at 90° is available in white matt, black matt, white acrylic UV varnish, white pine, sand oak, Polish oak 3D, white varnish, black varnish and LUX and WOOD collections

ORB horizontal cross-section

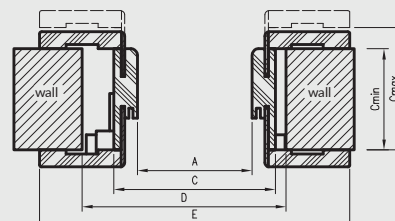


D - required width of wall passage


ORB cross-section 095-300

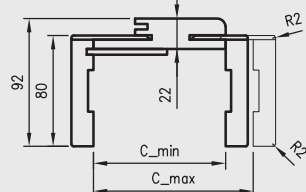

ORB cross-section 075



vertical cross-section of non-rebated door leaf

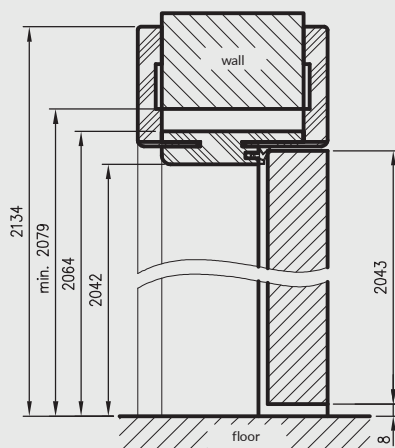

required wall passage height 2079 mm

for double-leaf doors

	A	C	D	E
120	1274	1318	1378	1458
130	1374	1418	1478	1558
140	1474	1518	1578	1658
150	1574	1618	1678	1758
160	1674	1718	1778	1858
170	1774	1818	1878	1958
180	1874	1918	1978	2058

for single-leaf doors

	A	C	D	E
60	627	671	711	811
70	727	771	811	911
80	827	871	911	1011
90	927	971	1011	1111
100	1027	1071	1111	1211

*075-095 door frame has a different cross section, for a 75-89 mm wall thickness, it will be necessary to shorten pen of the adjustable angle element.

Prices include 2 hinges with assembly plates.

Price of door frame for double doors: + 50% (in the case of using 3 hinges there is additional payment)

» Additional payment for the third hinge Estetic 80

» Extra charge for connection of main beams at 90 degree available in white mat, black mat, white UV varnish, white pine, sand oak, polish oak 3D, white varnish, black varnish and decors in collections LUX and WOOD