SARA ECO 2



SARA ECO 2 - sand oak door leaf with aluminum frame







SARA ECO 2 - standard 240 painted in the color of the wall

DOOR LEAF DECORS



*while stock last

**decor with black edge of the door leaf
**** decor available only in horizontal wood grain

DECOR

primed

NON-REBATED DOOR LEAVES WITH INVERTED REBATE

interior doors

NON-REBATED - OPENED OUTWARDS AND INVERTED REBATE - OPENED INWARDS

Sara Eco 2 door leaf is an innovative solution for creative interior design with the use of "invisible" doors. This unique construction gives possibility to finish surface of door leaf in the colors of the walls.

CONSTRUCTION OF SARA ECO 2 DOOR LEAF COMPRISES OF:

Aluminum door frame, "invisible" after assembly process, build in the wall or overlayed with plasterboards. After detailing process, the only visible part is the rebate of the door frame, prepared for future painting, e.q. in the colors of the walls. Non-rebated panel construction door leaf and inverted rebate in two finishing options:

- wide surfaces of door leaf are primed and ready for painting or paperhanging (e.q. in the colour of the walls). Edges of the leaf are covered with a paintable edge band. Painting is to be done at one-s discretion or optional choose painted decor.
- Wide door leaf surfaces covered with foils from DRE-Cell, 3D, CP black ST groups or with painting foil in the group of painted decors, the edges of the door leaf covered with the edging in the color of the foil (except for antique copper and concrete oxide colors).

OPTIONS AVAILABLE WITH EXTRA CHARGE WITH PRIMER

- ventilation undercut
- recuperative shortcut -8mm
- tubular chipboard in 202 standard
- tubular chipboard in 220 standard
- tubular chipboard in 240 standard
- solid chipboard in standard 202
- solid chipboard in standard 220
 solid chipboard, standard 240

STANDARD OPTION

- softwood or MDF frame (primed and painted)
- sockets for 2 or 3 recessed hinges, new hinges with increased load capacity up to 60 kg are used in white and black door frame colors
- · core made of "honeycomb"
- white or silver simple key magnetic lock, toilet lock, cylinder lock or economic lock

OPTIONS AVAILABLE WITH EXTRA CHARGE IN DRE-CELL, 3D AND PAINTED

- ventilation undercut
- recuperative shortcut -8mm
- plastic ventilation grille
- aluminum ventilation grille
- dropping seal
- tubular chipboard in 202 standard
- tubular chipboard in 220 standard
- tubular chipboard in 240 standard
- solid chipboard in standard 202
- solid chipboard in standard 220
- solid chipboard, standard 240

Price of the door frame includes 2 or 3 hidden concealed hinges.

Note: in the option with a tubular chipboard or solid chipboard in standard 202, there are required 3 hinges.

NOTE: Sara ECO 2 door leaves in primer with DRE aluminum frames in aluminum and white are available from stock in selected configurations.

AVAILABLE COLOURS OF ALUMINUM DOOR FRAMES



aluminum



White RAL 9003




black

TECHNICAL INFORMATIONS

SARA ECO 2 - NON-REBATED - OUTWARD OPENING DRE DOOR FRAME

Cross- section for Sara Eco2 non-rebated doors opened outwards

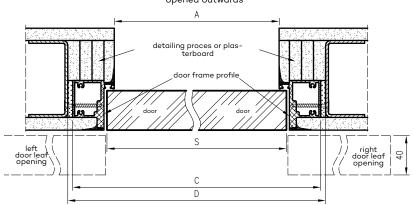


Dimensions of the door leaf width Sara Eco 2

odia Eco z					
	S	Α	С	D	
"60"	620	605	690	700	
"70"	720	705	790	800	
"80"	820	805	890	900	
"90"	920	905	990	1000	
"100"	1020	1005	1090	1100	

Door height dimensions

stan- dard	Н	HŚ	hw	НО
202x	2020	2020	2062	2070
220X	2200	2200	2242	2250
240X	2400	2400	2442	2450

Vertical cross - section for Sara Eco 2 door non-rebated - opening outwards




DRE profile for non-rebated outward opening doors



SARA ECO 2 - INVERTED REBATE - INWARD OPENING DRE DOOR FRAME

Cross-section of Sara Eco 2 with inverted rebate - opened inwards

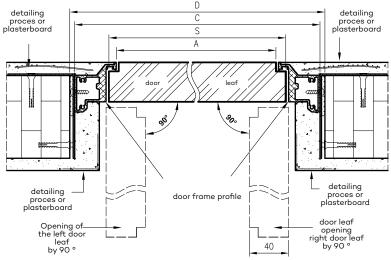

Dimensions of the door leaf width

	S	Α	С	D
"60"	620	605	690	700
"70"	720	705	790	800
"80"	820	805	890	900
"90"	920	905	990	1000
"100"	1020	1005	1090	1100

- S door leaf width
- A width of passage in door frame unit

Door height dimensions

H*

2030

2210

2410

Hś *

2030

2210

2410

H0 *

2080

2260

2072

2252

2452

stan-

dard


202x

220X

240X

- C external width of door frame D required width of wall opening

Vertical section of Sara Eco 2 with inverted rebate - opened inwards

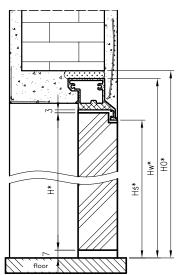

DRE profile for doors with inverted rebate opened inwards



50,4	
40	
13	42,2