

ADJUSTABLE DOOR FRAMES

NON-REBATED WITH VARIABLE HEIGHTS WITH ARCHITRAVE T80 OR T63



APPLICATION


Non-rebated adjustable door frame with variable heights can be used with non-rebated STANDARD 10, MODERN and PLUS door leaf model which are available in three additional door leaf height options: 1983 mm, 2110 mm and 2240 mm.

SET CONTAINS


Main beam (one horizontal and two vertical elements together with masking elements), door seal, set of hinges, all necessary components for the installation of door frames in accordance with the supplied instruction. Door frames are packed in cardboard boxes. Door frames are packed in cardboard boxes.

All door frames in 3 additional height options can be equipped with 2 or 3 hinges.


ORB cross-section 095-300




ORB cross-section 075



ORB vertical cross-section



ORB horizontal cross-section

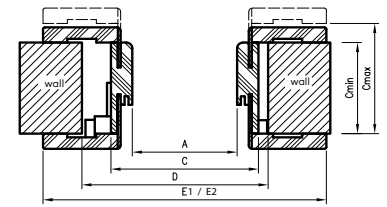

D - required width of wall passage

for single-leaf doors

	A	C	D	E1	E2
"60"	627	671	700	777	811
"70"	727	771	800	877	911
"80"	827	871	900	977	1011
"90"	927	971	1000	1077	1111
"100"	1027	1071	1100	1177	1211

E1 - dimension for T63 architrave
E2 - dimension for T80 architrave

H	H _S	hw	H ₀	hc **	hc *
1983	1982	2004	2019	2074	2057
2110	2109	2131	2146	2201	2184
2240	2239	2261	2276	2331	2314

H₀ - required the wall passage height

for double-leaf doors

	A	C	D	E2	E1
120	1274	1318	1350	1458	1424
130	1374	1418	1450	1558	1524
140	1474	1518	1550	1658	1624
150	1574	1618	1650	1758	1724
160	1674	1718	1750	1858	1824
170	1774	1818	1850	1958	1924
180	1874	1918	1950	2058	2024

* **NOTE:** 075-100 door frame has a different cross-section for a wall thickness of 75-95 mm it will be necessary to shorten the tongue of the movable architrave by yourself. Black ST decor, CPL cashmere laminate, light casella oak and laminates: standard gloss, metallic gloss, standard matt available only with T80 architrave. Prices for door leaf heights 1983 and 2043 on pages 148-149

Prices include 2 hinges with assembly plates.

- Price of the door frame for double doors: +50% (extra charge when using 3 hinges)
- Extra charge for the third Estetic 80 hinge
- Extra charge for reinforcement for self closer applies to door frames with 45° connection angle
- Extra charge for 90 degree connection (standard gloss, metallic gloss, standard matt)

wall thickness	
Cmin	Cmax
75	100
100	125
120	145
140	165
160	185
180	205
200	225
220	245
240	265
260	285
280	305
300	325